

**BRIDGESTONE**



# OFF-THE-ROAD TIRES

# VSDL

**V-Steel D-Lug**



## MAIN FEATURES

- **Superb cut resistance**
- **Long tread life**
- **Exceptional casing durability**
- **Enhanced stability and riding comfort**

### VSDL OFF-THE-ROAD TIRES

Tire size	Star rating	TRA code
8.25R15	*2	L5
10.00R15	*2	L5
14.5R15	*2	L5
12.00R20	*2	L5
15.5R25	*1	L5
17.5R25	*1 *2	L5
20.5R25	*1 *2	L5
23.5R25	*1 *2	L5
26.5R25	*1 *2	L5
29.5R25	*1 *2	L5
29.5R29	*1 *2	L5
35/65R33	*1 *2	L5
45/65R39	*1	L5
45/65R45	*1 *2	L5
50/65R51	*2	L5
55.5/80R57		L5

 **PASSION**  
for EXCELLENCE

# BRIDGESTONE OFF-THE-ROAD TIRES

## VSDL V-Steel D-Lug (L5)


**VSDL (V-Steel D-Lug) off-the-road radial tires with extra-deep tread patterns are specially designed for loaders and dozers operating on extremely rocky surfaces such as in underground mines, open pits and quarries.**



8.25R15~12.00R20  
VSDL Radial





15.5R25~55.5/80R57  
VSDL Radial

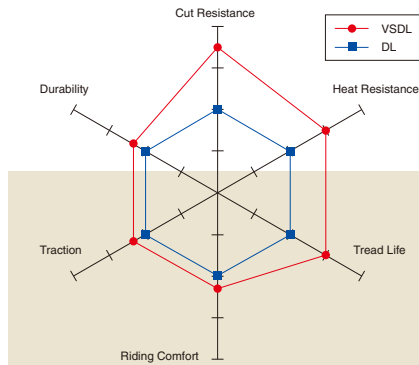

### Excellent cut resistance

Multi-ply steel belts and unique shape optimally prevent the tread and side-walls from cutting.

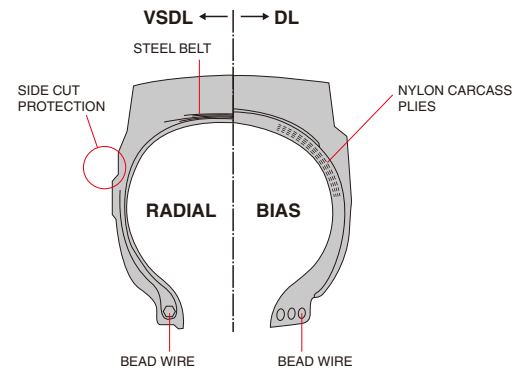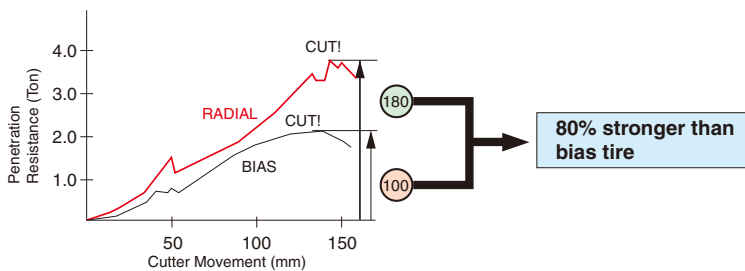

Tire Size	Star Rating	Type*	Recommended Rim/Flange Height	Approximate Inflated Dimensions								OTD
				OD		OW		SLR		SLW		
				mm	inch	mm	inch	mm	inch	mm	inch	
8.25R15	*2	T/T	6.50T	880	34.6	248	9.8	405	15.9	285	11.2	48.0
10.00R15	*2	T/T	7.50V	905	35.6	287	11.3	416	16.4	330	13.0	48.0
14.5R15	*2	T/L	11.00/1.5	899	35.4	359	14.1	413	16.3	412	16.2	48.0
12.00R20	*2	T/T	8.50V	1168	46.0	320	12.6	538	21.2	359	14.1	57.0
15.5R25	*1	T/L	12.00/1.3	1329	52.3	392	15.4	606	23.9	443	17.4	64.0
17.5R25	*1 *2	T/L	14.00/1.5	1400	55.1	440	17.3	639	25.2	495	19.5	68.0
20.5R25	*1 *2	T/L	17.00AL/1.7 17.00/2.0 (*1 only)	1552	61.1	531	20.9	704	27.7	583	23.0	78.0
23.5R25	*1 *2	T/L	19.50/2.5	1672	65.8	608	23.9	755	29.7	677	26.7	87.0
26.5R25	*1 *2	T/L	22.00/3.0	1788	70.4	684	26.9	797	31.4	761	30.0	95.5
29.5R25	*1 *2	T/L	25.00/3.5	1925	75.8	766	30.2	855	33.7	846	33.3	104.0
29.5R29	*1 *2	T/L	25.00/3.5	2008	79.1	776	30.6	900	35.4	856	33.7	104.5
35/65R33	*1 *2	T/L	28.00/3.5	2075	81.7	880	34.6	917	36.1	951	37.4	95.0
45/65R39	*1	T/L	32.00/4.5 36.00/4.5	2580	101.6	1074	42.3	1116	43.9	1205	47.4	116.0
45/65R45	*1 *2	T/L	36.00/4.5	2730	107.5	1123	44.2	1188	46.8	1274	50.2	111.5
50/65R51	*2	T/L	40.00/4.5	3070	120.9	1278	50.3	1347	53.0	1361	53.6	128.0
55.5/80R57		T/L	44.00/6.0	3740	147.2	1410	55.5	1634	64.3	1616	63.6	125.5

\*Note: T/T: Tubed type T/L: Tubeless type

Specifications are subject to change without notice.

